

You are here: [Products](#) » [Heatsinks f.cool](#) » [Profile heatsinks and fluid coolers](#) » [Standard extruded heatsinks](#) » [SK 125 ...](#) » [SK 125](#)



▼ Heatsinks f.cool

- ▼ Profile heatsinks and fluid coolers
 - [Standard extruded heatsinks](#)
 - Extruded heatsinks for lock-in retaining spring
 - Extruded heatsinks for PCB mounting
 - Extruded heatsinks for DC/DC converter
 - Retaining springs for transistors
 - U-Extruded heatsinks
 - Die-cast heatsinks
 - Fin coolers
 - Fluid coolers
 - Aluminium flat-, quadrangular-, angled-, U- and T-profiles
- ▶ Heatsinks and active heatsinks for processors
- ▶ Board Level heatsinks
- ▶ Cooling aggregates
- ▶ Accessories for electronic components
- ▶ **Cases f.case**
- ▶ **Connectors f.con**

Standard extruded heatsinks


SK 125 ...

SK 125 50 SA

30 x 28 mm, for use on Euro cards, profile thread

[Data sheet](#)

[add to request](#)

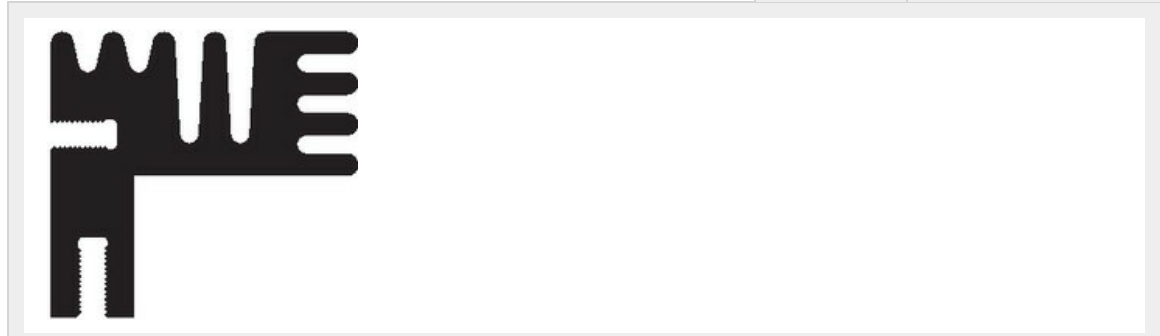

Features Technical Drawing Service Accessories / related products

way of fixation	transistor screw mounting
width B	30 mm
height	28 mm
plate thickness	8 mm
length	50 mm
thermal resistance R_{th}	9.1 - 4.9 K/W
surface	black anodised