


FEATURES AND BENEFITS

- Low power loss, high efficiency operation
- Low forward voltage drop
- Fast switching capability
- High forward surge capability
- Excellent High Temperature Stability

MECHANICAL DATA

- Epoxy : UL94 V-0 rated flame retardant
- Case: TO-277 Package
- Terminals: Matte Tin annealed over copper
- Weight: Approximated 0.129 grams

Primary Characteristic	
I_o	15A
V_{RRM}	100V
I_{FSM}	200A
V_F Typical=2.5A $T_J=125^\circ\text{C}$	0.36V
T_{Jmax}	150°C

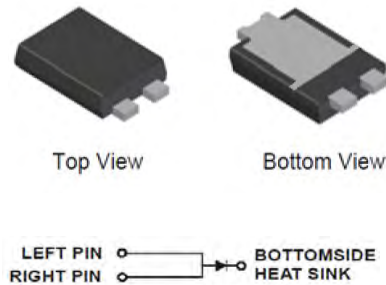

Maximum Ratings ($T_a=25^\circ\text{C}$ unless otherwise specified)					
Characteristics	Symbol	Value	Unit		
Peak Repetitive Reverse Voltage	V_{RRM}	100	V		
Working Peak Reverse Voltage	V_{RWM}	100	V		
DC Blocking Voltage	V_{DC}	100	V		
RMS Reverse Voltage	V_{RMS}	70	V		
Average Forward Rectified Current (per diode)	I_o	15	Amps		
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	200	Amps		
Electrical Characteristics ($T_a=25^\circ\text{C}$ unless otherwise specified)					
Characteristics	Symbol	Typ.	Max.	Unit	
Forward Voltage Drop	V_F	IF=2.5A $T_a=25^\circ\text{C}$	0.43	0.47	V
		IF=15A $T_a=25^\circ\text{C}$	0.72	0.76	
		IF=2.5A $T_a=125^\circ\text{C}$	0.36	0.40	
		IF=15A $T_a=125^\circ\text{C}$	0.60	0.64	
Reverse Current	I_R	VR=100V $T_a=25^\circ\text{C}$	20	60	μA
		VR=100V $T_a=125^\circ\text{C}$	15	45	mA

Notes (1): Pulse test: 300 μs pulse width, 1% duty cycle,

Notes (2): Pulse width $\leq 40\text{ms}$

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)			
Characteristics	Symbol	Value	Unit
Typical Thermal Resistance, junction to ambient	$R_{\theta JA}$	105	$^\circ\text{C}/\text{W}$
Operating Temperature Range (in DC Mode)	T_J	-65 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^\circ\text{C}$

Notes (3): FR-4 PCB, 2oz copper. Minimum recommended pad layout

RATINGS AND CHARACTERISTICS CURVES

Fig 1. Typical Forward Characteristics

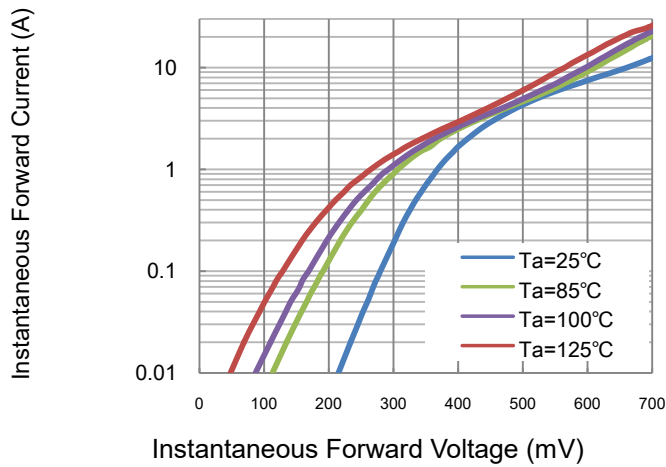


Fig 2. Typical Reverse Characteristics

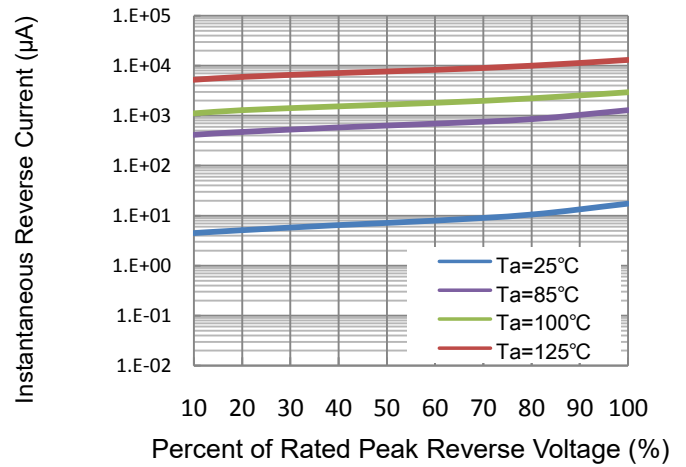


Fig 3. Typical Forward Current Derating Curve



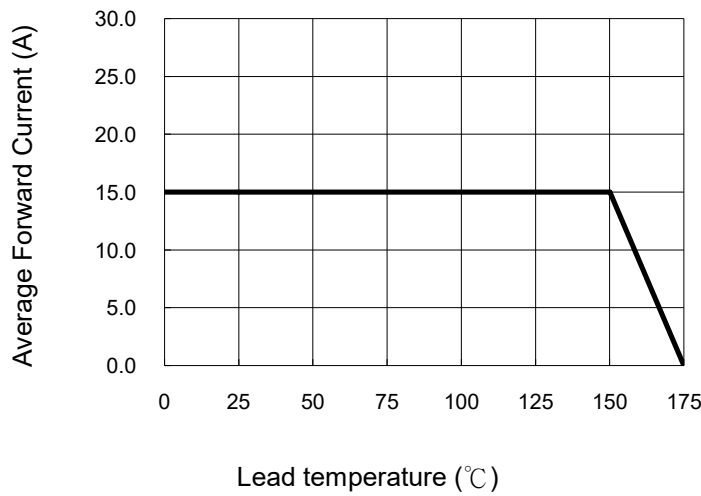



Fig 4. Non-repetitive Forward Surge Current

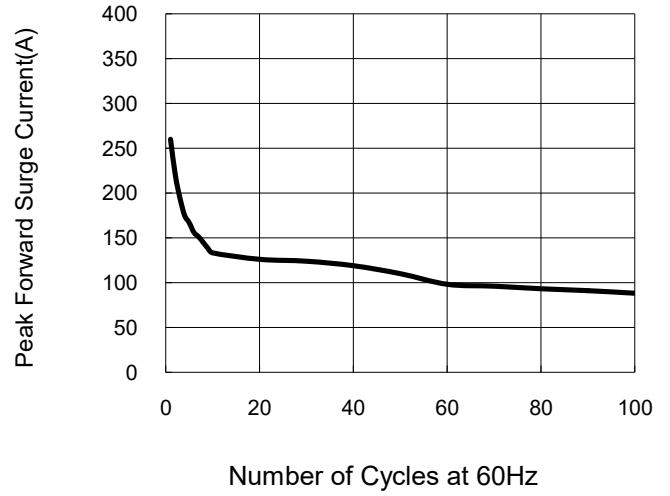

Package Outline Dimensions (in millimeters)

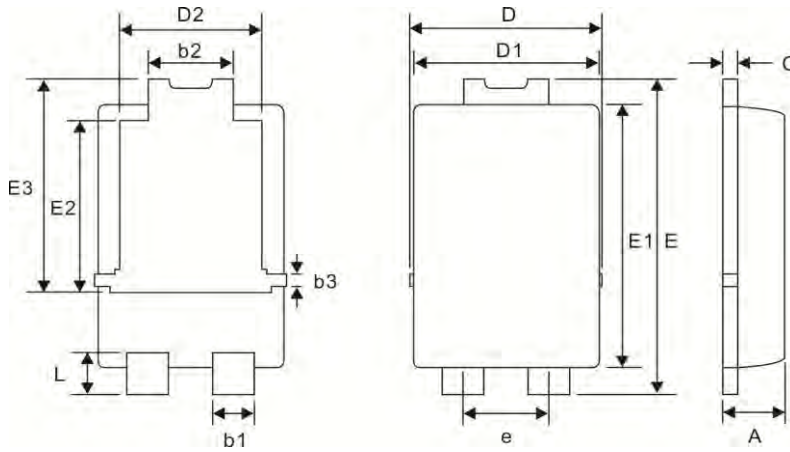

SYMBOL	DIMENSIONS		
	MIN	NOM	MAX
A	1.05	1.10	1.15
b1	0.80	0.90	0.99
b2	1.70	1.79	1.88
b3	0.15	0.25	0.35
C	0.20	0.25	0.33
D	4.00	4.20	4.30
D1	3.90	3.98	4.05
D2	2.95	3.05	3.15
E	6.40	6.50	6.60
E1	5.30	5.40	5.45
E2	3.45	3.55	3.65
E3	4.20	4.40	4.60
e	1.84 Typ		
L	0.75	0.85	0.95

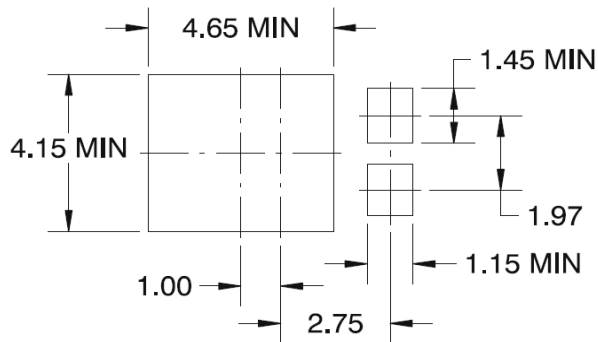

LAND PATTERN RECOMMENDATION