


**SMDJ Series**

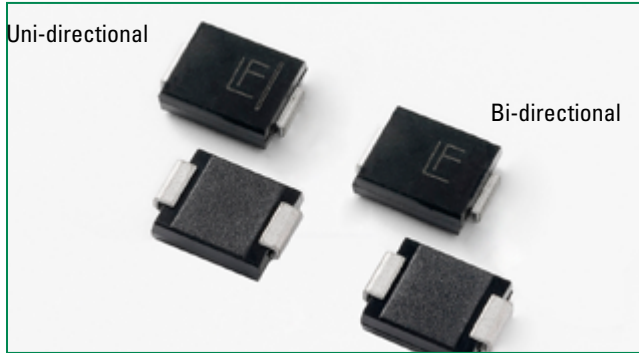

**Agency Approvals**


| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
|        | E230531            |

**Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)**

| Parameter  | Symbol           | Value      | Unit |
|--|------------------|------------|------|
| Peak Pulse Power Dissipation at T <sub>A</sub> =25°C by 10/1000µs Waveform (Fig.2)(Note 1), (Note 2), (Note 5) | P <sub>PPM</sub> | 3000       | W    |
| Power Dissipation on Infinite Heat Sink at T <sub>L</sub> =50°C  | P <sub>D</sub>   | 6.5        | W    |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)   | I <sub>FSM</sub> | 300        | A    |
| Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only(Note 4)                                  | V <sub>F</sub>   | 3.5/5.0    | V    |
| Operating Temperature Range  | T <sub>J</sub>   | -65 to 150 | °C   |
| Storage Temperature Range  | T <sub>STG</sub> | -65 to 175 | °C   |
| Typical Thermal Resistance Junction to Lead  | R <sub>θJL</sub> | 15         | °C/W |
| Typical Thermal Resistance Junction to Ambient   | R <sub>θJA</sub> | 75         | °C/W |

- Notes:**
1. Non-repetitive current pulse, per Fig. 4 and derated above T<sub>J</sub> (initial) =25°C per Fig. 3.
  2. Mounted on copper pad area of 0.31x0.31" (8.0 x 8.0mm) to each terminal.
  3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
  4. V<sub>F</sub> < 3.5V for single die parts and V<sub>F</sub> < 5.0V for stacked-die parts.
  5. The P<sub>PPM</sub> of stacked-die parts is 4000W and please contact littelfuse for the detail stacked-die parts.

**Functional Diagram**

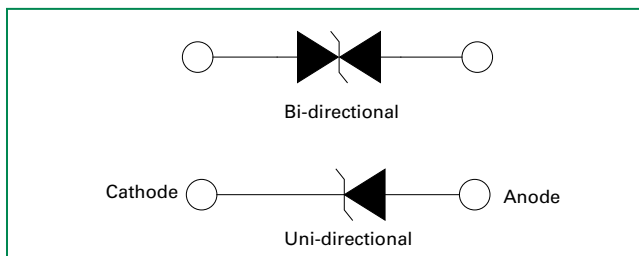

**Description**

The SMDJ series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

**Features**

- 3000W peak pulse power capability at 10/1000µs waveform, repetition rate (duty cycles):0.01 %
- For surface mounted applications in order to optimize board space
- Low profile package
- Typical failure mode is short from over-specified voltage or current
- Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- IEC-61000-4-2 ESD 30kV(Air), 30kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- Built-in strain relief
- Glass passivated chip junction
- Fast response time: typically less than 1.0ps from 0V to BV min
- Excellent clamping capability
- Low incremental surge resistance
- Typical I<sub>R</sub> less than 2µA when V<sub>BR</sub> min>12V
- High temperature to reflow soldering guaranteed: 260°C/40sec
- V<sub>BR</sub> @ T<sub>J</sub>=V<sub>BR</sub> @25°C x (1+αT x (T<sub>J</sub> - 25)) (α T:Temperature Coefficient, typical value is 0.1%)
- Plastic package is flammability rated V-0 per Underwriters Laboratories
- Meet MSL level1, per J-STD-020, LF maximum peak of 260°C
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

**Applications**

TVS devices are ideal for the protection of I/O Interfaces, V<sub>CC</sub> bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

**Additional Information**



**Datasheet**



**Resources**



**Samples**

# Transient Voltage Suppression Diodes



Surface Mount – 3000W > SMDJ series

## Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Marking |     | Reverse Stand off Voltage V <sub>R</sub> (Volts) | Breakdown Voltage V <sub>BR</sub> (Volts) @ I <sub>T</sub> |        | Test Current I <sub>T</sub> (mA) | Maximum Clamping Voltage V <sub>C</sub> @ I <sub>pp</sub> (V) | Maximum Peak Pulse Current I <sub>pp</sub> (A) | Maximum Reverse Leakage I <sub>R</sub> @ V <sub>R</sub> (µA) | Agency Approval  |
|-------------------|------------------|---------|-----|--|--|--------|----------------------------------|---|--|--|---|
|                   |                  | UNI     | BI  |  | MIN  | MAX    |                                  |   |  |  |   |
| SMDJ5.0A          | SMDJ5.0CA        | RDE     | DDE | 5.0  | 6.40   | 7.00   | 10                               | 9.2   | 326.1  | 800  | X   |
| SMDJ6.0A          | SMDJ6.0CA        | RDG     | DDG | 6.0  | 6.67   | 7.37   | 10                               | 10.3  | 291.3  | 800  | X   |
| SMDJ6.5A          | SMDJ6.5CA        | RDK     | DDK | 6.5  | 7.22   | 7.98   | 10                               | 11.2  | 267.9  | 500  | X   |
| SMDJ7.0A          | SMDJ7.0CA        | PDM     | DDM | 7.0  | 7.78   | 8.60   | 10                               | 12.0  | 250.0  | 200  | X   |
| SMDJ7.5A          | SMDJ7.5CA        | PDP     | DDP | 7.5  | 8.33   | 9.21   | 1                                | 12.9  | 232.6  | 100  | X   |
| SMDJ8.0A          | SMDJ8.0CA        | PDR     | DDR | 8.0  | 8.89   | 9.83   | 1                                | 13.6  | 220.6  | 50   | X   |
| SMDJ8.5A          | SMDJ8.5CA        | PDT     | DDT | 8.5  | 9.44   | 10.40  | 1                                | 14.4  | 208.3  | 20   | X   |
| SMDJ9.0A          | SMDJ9.0CA        | PDV     | DDV | 9.0  | 10.00  | 11.10  | 1                                | 15.4  | 194.8  | 10   | X   |
| SMDJ10A           | SMDJ10CA         | PDX     | DDX | 10.0   | 11.10  | 12.30  | 1                                | 17.0  | 176.5  | 5  | X   |
| SMDJ11A           | SMDJ11CA         | PDZ     | DDZ | 11.0   | 12.20  | 13.50  | 1                                | 18.2  | 164.8  | 2  | X   |
| SMDJ12A           | SMDJ12CA         | PEE     | DEE | 12.0   | 13.30  | 14.70  | 1                                | 19.9  | 150.8  | 2  | X   |
| SMDJ13A           | SMDJ13CA         | PEG     | DEG | 13.0   | 14.40  | 15.90  | 1                                | 21.5  | 139.5  | 2  | X   |
| SMDJ14A           | SMDJ14CA         | PEK     | DEK | 14.0   | 15.60  | 17.20  | 1                                | 23.2  | 129.3  | 2  | X   |
| SMDJ15A           | SMDJ15CA         | PEM     | DEM | 15.0   | 16.70  | 18.50  | 1                                | 24.4  | 123.0  | 2  | X   |
| SMDJ16A           | SMDJ16CA         | PEP     | DEP | 16.0   | 17.80  | 19.70  | 1                                | 26.0  | 115.4  | 2  | X   |
| SMDJ17A           | SMDJ17CA         | PER     | DER | 17.0   | 18.90  | 20.90  | 1                                | 27.6  | 108.7  | 2  | X   |
| SMDJ18A           | SMDJ18CA         | PET     | DET | 18.0   | 20.00  | 22.10  | 1                                | 29.2  | 102.7  | 2  | X   |
| SMDJ20A           | SMDJ20CA         | PEV     | DEV | 20.0   | 22.20  | 24.50  | 1                                | 32.4  | 92.6   | 2  | X   |
| SMDJ22A           | SMDJ22CA         | PEX     | DEX | 22.0   | 24.40  | 26.90  | 1                                | 35.5  | 84.5   | 2  | X   |
| SMDJ24A           | SMDJ24CA         | PEZ     | DEZ | 24.0   | 26.70  | 29.50  | 1                                | 38.9  | 77.1   | 2  | X   |
| SMDJ26A           | SMDJ26CA         | PFE     | DFE | 26.0   | 28.90  | 31.90  | 1                                | 42.1  | 71.3   | 2  | X   |
| SMDJ28A           | SMDJ28CA         | PFG     | DFG | 28.0   | 31.10  | 34.40  | 1                                | 45.4  | 66.1   | 2  | X   |
| SMDJ30A           | SMDJ30CA         | PFK     | DFK | 30.0   | 33.30  | 36.80  | 1                                | 48.4  | 62.0   | 2  | X   |
| SMDJ33A           | SMDJ33CA         | PFM     | DFM | 33.0   | 36.70  | 40.60  | 1                                | 53.3  | 56.3   | 2  | X   |
| SMDJ36A           | SMDJ36CA         | PFV     | DFV | 36.0   | 40.00  | 44.20  | 1                                | 58.1  | 51.6   | 2  | X   |
| SMDJ40A           | SMDJ40CA         | PFR     | DFR | 40.0   | 44.40  | 49.10  | 1                                | 64.5  | 46.5   | 2  | X   |
| SMDJ43A           | SMDJ43CA         | PFT     | DFT | 43.0   | 47.80  | 52.80  | 1                                | 69.4  | 43.2   | 2  | X   |
| SMDJ45A           | SMDJ45CA         | PFV     | DFV | 45.0   | 50.00  | 55.30  | 1                                | 72.7  | 41.3   | 2  | X   |
| SMDJ48A           | SMDJ48CA         | PFX     | DFX | 48.0   | 53.30  | 58.90  | 1                                | 77.4  | 38.8   | 2  | X   |
| SMDJ51A           | SMDJ51CA         | PFZ     | DFZ | 51.0   | 56.70  | 62.70  | 1                                | 82.4  | 36.4   | 2  | X   |
| SMDJ54A           | SMDJ54CA         | RGE     | DGE | 54.0   | 60.00  | 66.30  | 1                                | 87.1  | 34.4   | 2  | X   |
| SMDJ58A           | SMDJ58CA         | PGG     | DGG | 58.0   | 64.40  | 71.20  | 1                                | 93.6  | 32.1   | 2  | X   |
| SMDJ60A           | SMDJ60CA         | PGK     | DGK | 60.0   | 66.70  | 73.70  | 1                                | 96.8  | 31.0   | 2  | X   |
| SMDJ64A           | SMDJ64CA         | PGM     | DGM | 64.0   | 71.10  | 78.60  | 1                                | 103.0   | 29.1   | 2  | X   |
| SMDJ70A           | SMDJ70CA         | PGP     | DGP | 70.0   | 77.80  | 86.00  | 1                                | 113.0   | 26.5   | 2  | X   |
| SMDJ75A           | SMDJ75CA         | PGR     | DGR | 75.0   | 83.30  | 92.10  | 1                                | 121.0   | 24.8   | 2  | X   |
| SMDJ78A           | SMDJ78CA         | PGT     | DGT | 78.0   | 86.70  | 95.80  | 1                                | 126.0   | 23.8   | 2  | X   |
| SMDJ85A           | SMDJ85CA         | PGV     | DGV | 85.0   | 94.40  | 104.00 | 1                                | 137.0   | 21.9   | 2  | X   |
| SMDJ90A           | SMDJ90CA         | PGX     | DGX | 90.0   | 100.00   | 111.00 | 1                                | 146.0   | 20.5   | 2  | X   |
| SMDJ100A          | SMDJ100CA        | PGZ     | DGZ | 100.0  | 111.00   | 123.00 | 1                                | 162.0   | 18.5   | 2  | X   |
| SMDJ110A          | SMDJ110CA        | PHE     | DHE | 110.0  | 122.00   | 135.00 | 1                                | 177.0   | 16.9   | 2  | X   |
| SMDJ120A          | SMDJ120CA        | PHG     | DHG | 120.0  | 133.00   | 147.00 | 1                                | 193.0   | 15.5   | 2  | X   |
| SMDJ130A          | SMDJ130CA        | PHK     | DHK | 130.0  | 144.00   | 159.00 | 1                                | 209.0   | 14.4   | 2  | X   |
| SMDJ150A          | SMDJ150CA        | PHM     | DHM | 150.0  | 167.00   | 185.00 | 1                                | 243.0   | 12.3   | 2  | X   |
| SMDJ160A          | SMDJ160CA        | PHP     | DHP | 160.0  | 178.00   | 197.00 | 1                                | 259.0   | 11.6   | 2  | X   |
| SMDJ170A          | SMDJ170CA        | PHR     | DHR | 170.0  | 189.00   | 209.00 | 1                                | 275.0   | 10.9   | 2  | X   |
| SMDJ180A          | SMDJ180CA        | PHT     | DHT | 180.0  | 200.00   | 221.00 | 1                                | 292.0   | 10.3   | 2  | X   |
| SMDJ220A          | SMDJ220CA        | PKE     | DKE | 220.0  | 244.00   | 270.00 | 1                                | 356.0   | 8.4  | 2  | X   |

For bidirectional type having V<sub>R</sub> of 10 volts and less, the I<sub>R</sub> limit is double.  
For parts without A, the V<sub>BR</sub> is ± 10% and V<sub>C</sub> is 5% higher than with A parts


**I-V Curve Characteristics**

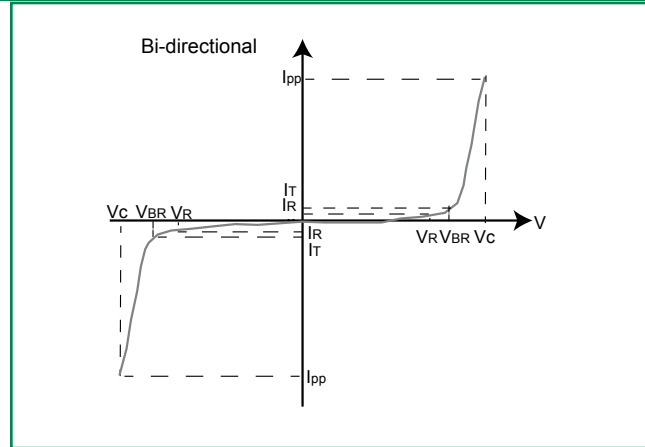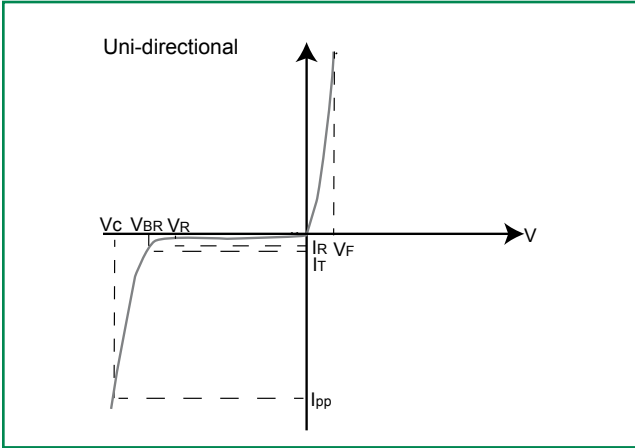


- $P_{PPM}$  Peak Pulse Power Dissipation** – Max power dissipation
- $V_R$  Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation
- $V_{BR}$  Breakdown Voltage** – Maximum voltage that flows thogh the TVS at a specified test current ( $I_T$ )
- $V_C$  Clamping Voltage** – Peak voltage measured across the TVS at a specified  $I_{ppm}$  (peak impulse current)
- $I_R$  Reverse Leakage Current** – Current measured at  $V_R$
- $V_F$  Forward Voltage Drop for Uni-directional**

**Ratings and Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

**Figure 1 - TVS Transients Clamping Waveform**

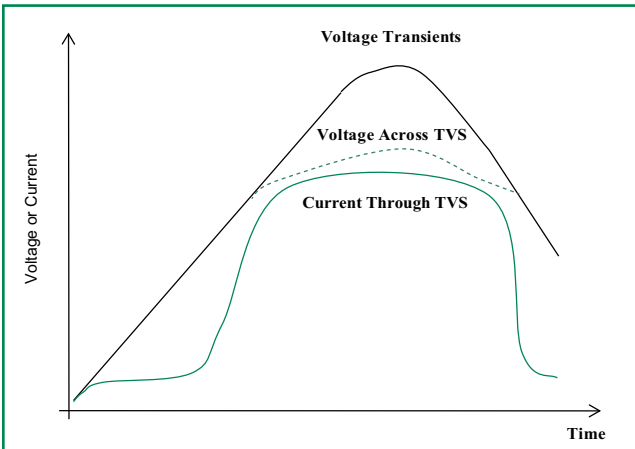


**Figure 2 - Peak Pulse Power Rating**

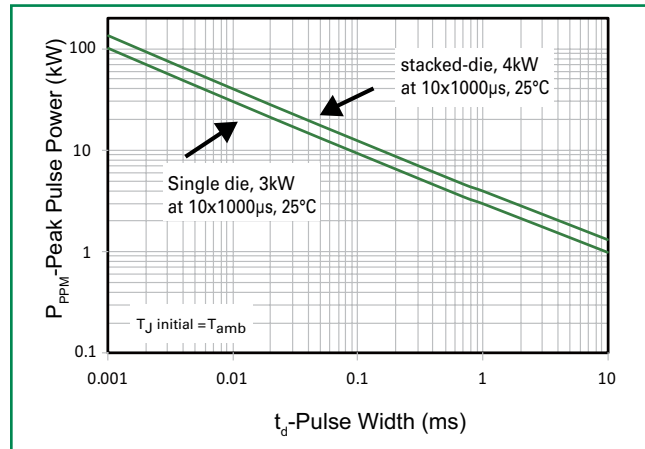


continues on next page.

### Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)


#### Figure 3 - Peak Pulse Power Derating Curve

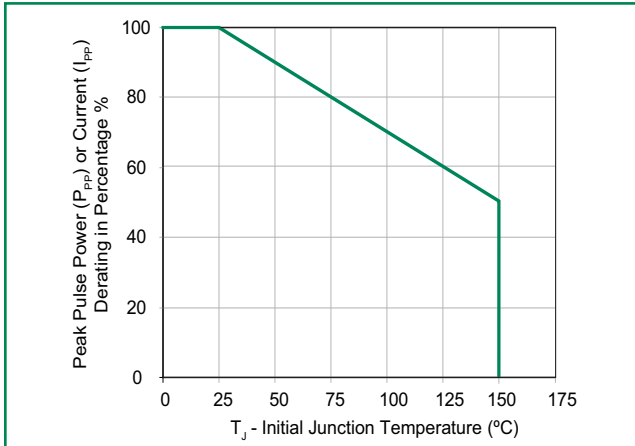


#### Figure 4 - Pulse Waveform

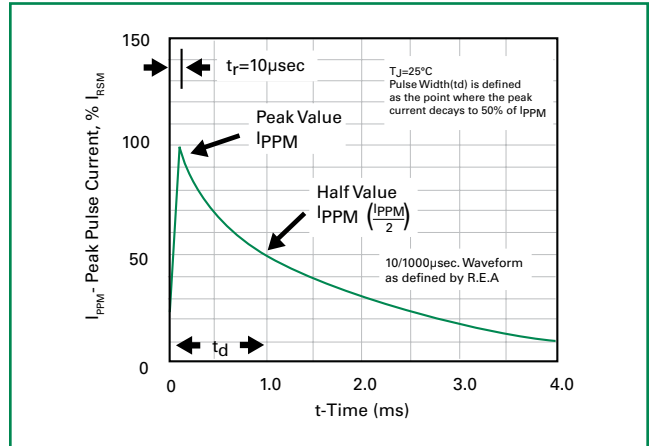


#### Figure 5 - Typical Junction Capacitance

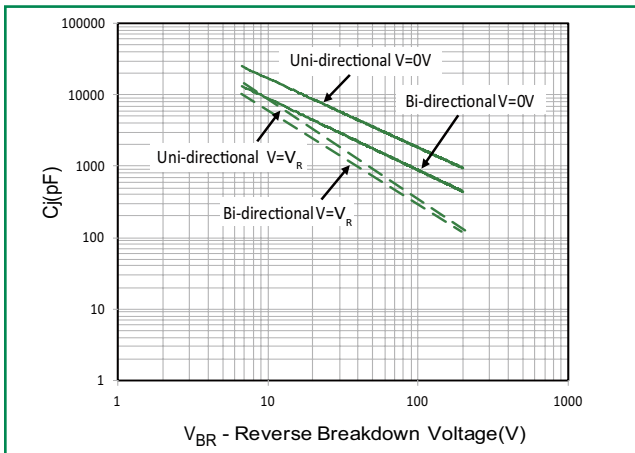


#### Figure 6 - Typical Transient Thermal Impedance

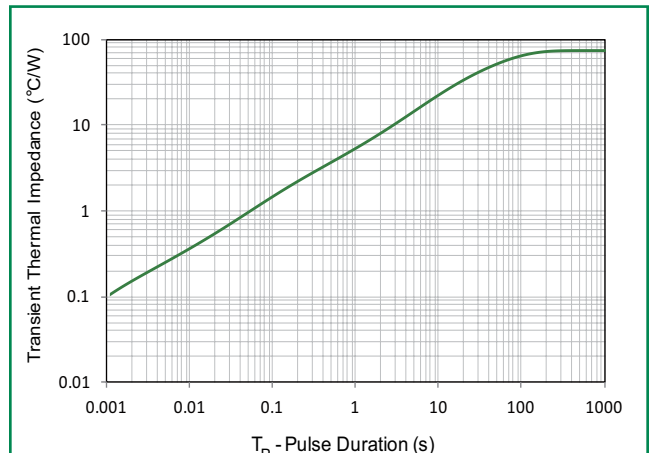

#### Figure 7 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only

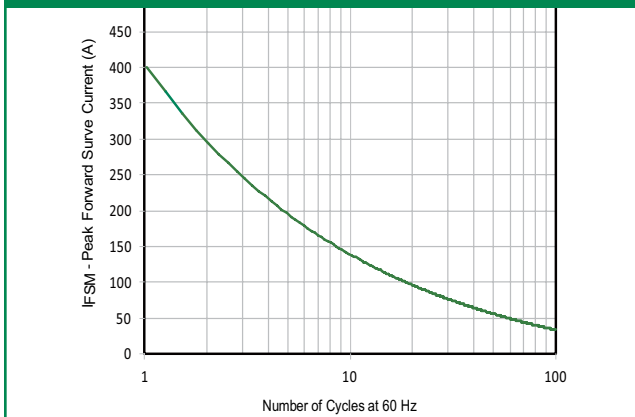


#### Figure 8 - Peak Forward Voltage Drop vs Peak Forward Current (Typical Values)

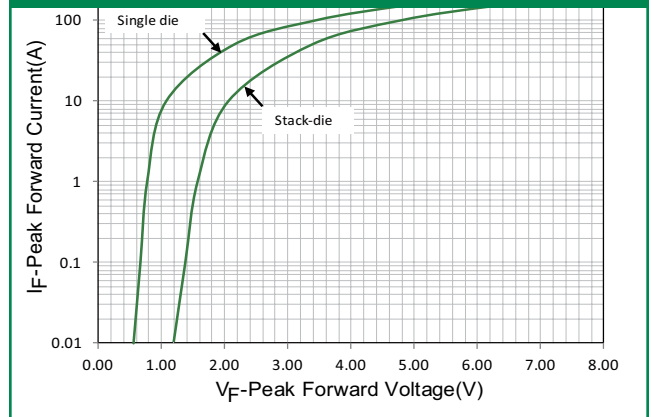

**Soldering Parameters**

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Lead-free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_A$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_A$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow   | - Temperature ( $T_A$ ) (Liquidus) | 217°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate   |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed  |                                    | 260°C                   |

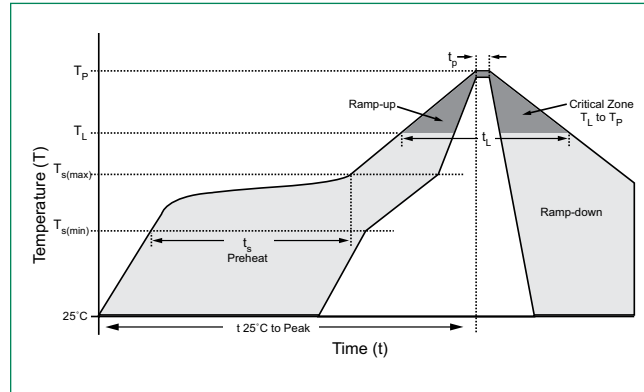

**Physical Specifications**


|                 |   |
|-----------------|---|
| <b>Weight</b>   | 0.007 ounce, 0.21 grams   |
| <b>Case</b>     | JEDEC DO214AB. Molded plastic body over glass passivated junction |
| <b>Polarity</b> | Color band denotes positive end (cathode) except Bidirectional.   |
| <b>Terminal</b> | Matte Tin-plated leads, Solderable per JESD22-B102                |

**Environmental Specifications**

|                            |                          |
|----------------------------|--------------------------|
| <b>High Temp. Storage</b>  | JESD22-A103              |
| <b>HTRB</b>                | JESD22-A108              |
| <b>Temperature Cycling</b> | JESD22-A104              |
| <b>MSL</b>                 | JEDEC-J-STD-020, Level 1 |
| <b>H3TRB</b>               | JESD22-A101              |
| <b>RSH</b>                 | JESD22-A111              |


**Dimensions**

**DO-214AB (SMC J-Bend)**

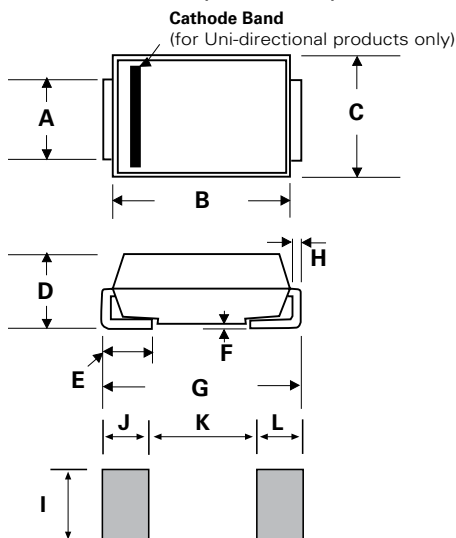


| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.114  | 0.126 | 2.900       | 3.200 |
| B          | 0.260  | 0.280 | 6.600       | 7.110 |
| C          | 0.220  | 0.245 | 5.590       | 6.220 |
| D          | 0.079  | 0.103 | 2.060       | 2.620 |
| E          | 0.030  | 0.060 | 0.760       | 1.520 |
| F          | -      | 0.008 | -           | 0.203 |
| G          | 0.305  | 0.320 | 7.750       | 8.130 |
| H          | 0.006  | 0.012 | 0.152       | 0.305 |
| I          | 0.129  | -     | 3.300       | -     |
| J          | 0.094  | -     | 2.400       | -     |
| K          | -      | 0.165 | -           | 4.200 |
| L          | 0.094  | -     | 2.400       | -     |

### Part Numbering System

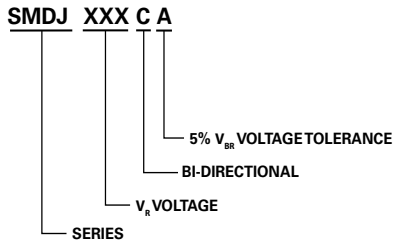


### Part Marking System

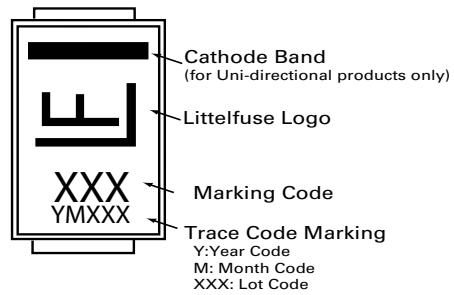

### Packaging Options

| Part number  | Component Package | Quantity | Packaging Option                 | Packaging Specification |
|--------------|-------------------|----------|----------------------------------|-------------------------|
| SMDJxxxXX    | DO-214AB          | 3000     | Tape & Reel - 16mm tape/13" reel | EIA STD RS-481          |
| SMDJxxxXX-T7 | DO-214AB          | 500      | Tape & Reel - 16mm tape/7" reel  | EIA STD RS-481          |

### Tape and Reel Specification

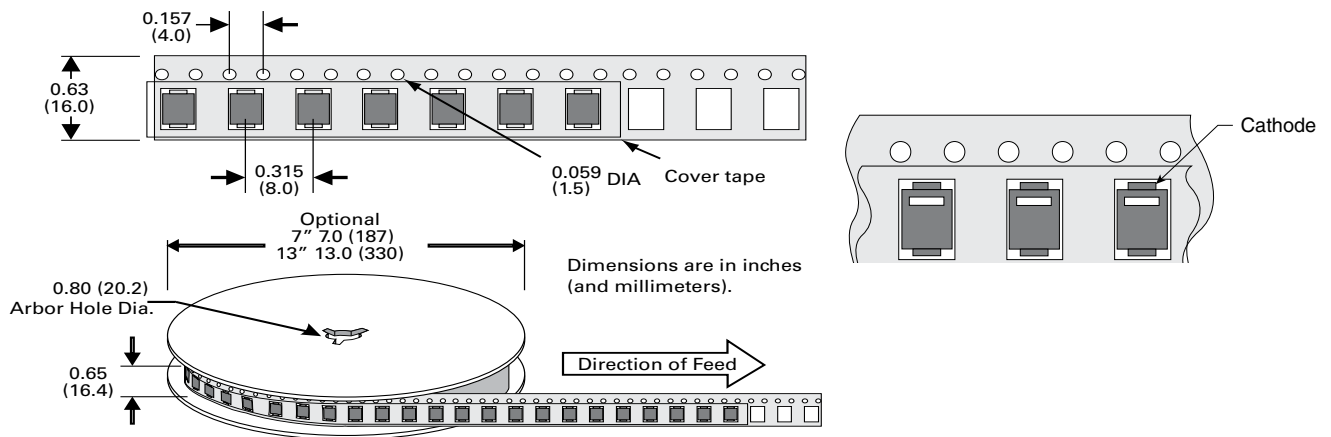

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Littelfuse:

[SMDJ54](#) [SMDJ6.0](#) [SMDJ30C](#) [SMDJ18CA](#) [SMDJ150A](#) [SMDJ85C](#) [SMDJ45C](#) [SMDJ75](#) [SMDJ20C](#) [SMDJ13CA](#)  
[SMDJ40](#) [SMDJ7.5A](#) [SMDJ110](#) [SMDJ26](#) [SMDJ90A](#) [SMDJ26CA](#) [SMDJ40CA](#) [SMDJ100](#) [SMDJ64A](#) [SMDJ9.0C](#)  
[SMDJ17CA](#) [SMDJ54CA](#) [SMDJ6.5C](#) [SMDJ160](#) [SMDJ14C](#) [SMDJ70](#) [SMDJ14CA](#) [SMDJ45CA](#) [SMDJ30CA](#)  
[SMDJ120](#) [SMDJ58](#) [SMDJ11C](#) [SMDJ9.0CA](#) [SMDJ20CA](#) [SMDJ7.5C](#) [SMDJ11A](#) [SMDJ110CA](#) [SMDJ24A](#)  
[SMDJ6.0CA](#) [SMDJ60C](#) [SMDJ78](#) [SMDJ22C](#) [SMDJ43](#) [SMDJ58CA](#) [SMDJ8.0A](#) [SMDJ16A](#) [SMDJ7.0C](#) [SMDJ170CA](#)  
[SMDJ8.0](#) [SMDJ120C](#) [SMDJ28](#) [SMDJ75CA](#) [SMDJ58C](#) [SMDJ15C](#) [SMDJ5.0A](#) [SMDJ17](#) [SMDJ15A](#) [SMDJ43CA](#)  
[SMDJ160A](#) [SMDJ28CA](#) [SMDJ33A](#) [SMDJ70A](#) [SMDJ10C](#) [SMDJ5.0](#) [SMDJ78C](#) [SMDJ12](#) [SMDJ22CA](#) [SMDJ22A](#)  
[SMDJ48A](#) [SMDJ33CA](#) [SMDJ8.0C](#) [SMDJ150C](#) [SMDJ85](#) [SMDJ9.0](#) [SMDJ64C](#) [SMDJ17C](#) [SMDJ160C](#) [SMDJ48CA](#)  
[SMDJ6.5A](#) [SMDJ17A](#) [SMDJ40A](#) [SMDJ130](#) [SMDJ78A](#) [SMDJ6.5](#) [SMDJ5.0C](#) [SMDJ12C](#) [SMDJ90C](#) [SMDJ48C](#)  
[SMDJ10CA](#) [SMDJ12A](#) [SMDJ54A](#) [SMDJ26A](#) [SMDJ6.0A](#) [SMDJ170A](#) [SMDJ75A](#) [SMDJ13](#) [SMDJ45](#) [SMDJ170](#)  
[SMDJ33C](#) [SMDJ15CA](#)