




MAIN FEATURES


- Subminiature, PCB Mounting.
- Heavy Duty, Silver Alloy Contacts up to 30A or 45A.
- 1 Form A, 1 Form B or 1 Form C.
- Two different spacing arrangements of terminals are available to meet the world standards.
- Used for Automotives, Industrial Control. Household Appliances and Heavy Loads, etc.



TYPICAL APPLICATIONS IN AUTOMOTIVE INDUSTRY

- Direction Indicators
- Interval Wipers Control
- Fuel Pump Control
- Ventilation Motor
- Hazard Lights
- Heater Control
- Air Conditioning
- Central door lock
- Anti-lock braking system
- Self tension adjustment
- Window lifter
- Seat positioning
- Car alarm system
- Initial value control
- Automatic mirror adjustment
- Sliding roof
- Rear Window Heating
- Flashes or turning signals


ORDERING INFORMATION

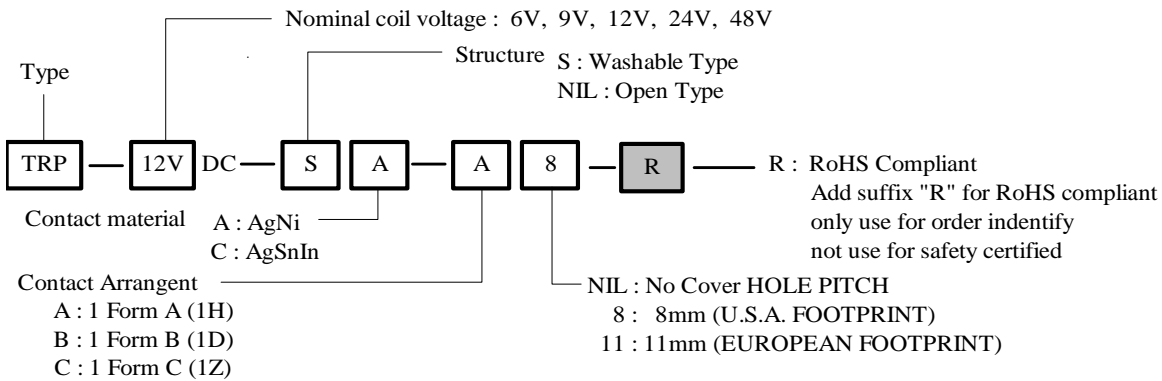

DIMENSION (unit:mm)

DRILLING (unit:mm)

WIRING DIAGRAM

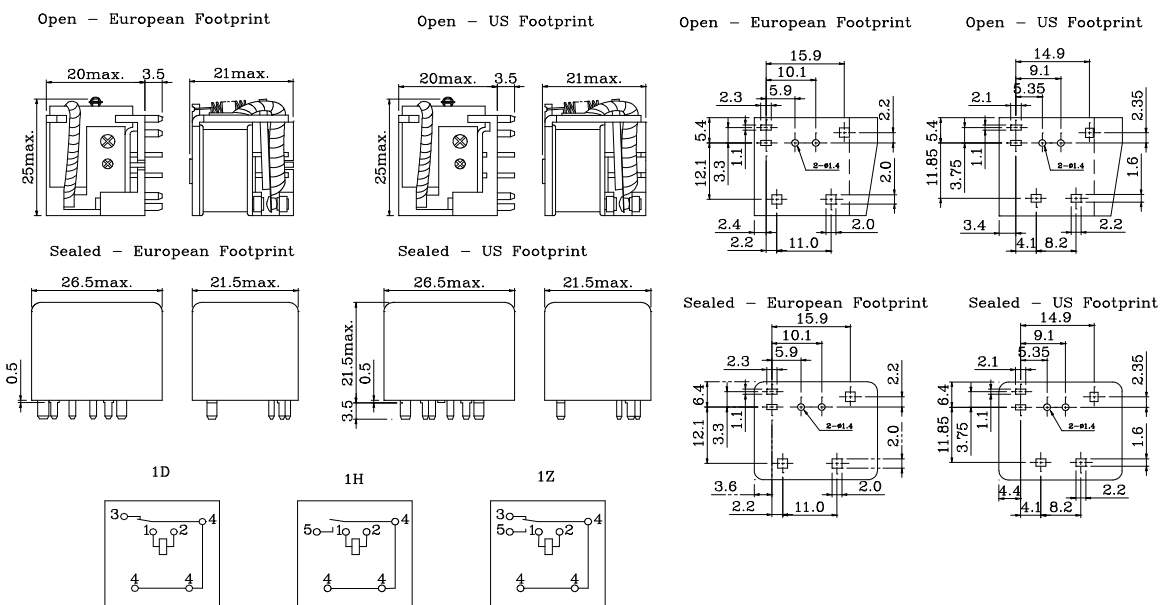

COIL DATA CHART (AT20°C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω) $\pm 10\%$	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max-Allowable Voltage (VDC)
TRP	06	6	315	19	abt. 1.6 ~ 1.9	60% Max.	10% Min.	160%
	12	12	136	90				
	24	24	67	360				



CONTACT RATING

Item	Type	TRP			
		Form A (1H)	Form B (1D)	Form C (1Z)	
				N/O	N/C
Contact Rating		40A 15VDC or 12A 60VAC Resistive			
Max. Continuous Current		45A	30A	45A	30A
Max. Make Current		100A	30A	100A	30A
Max. Break Current		60A	30A	60A	30A
Max. Switch Voltage		75VDC ; 60VAC			
Contact Material		Ag Alloy			

PERFORMANCE (at initial value)

Item	Type	TRP
Contact Resistance		100m Ω Max.
Operate Time		5msec Max.
Release Time		3msec Max.
Dielectric Strength		500Vrms.
Insulation Resistance		100 M Ω Min. (500VDC)
Operating Ambient Temperature		-40°C to +125°C See Ambient Temperature carry -40°C to +155°C (No water condensation and no water drop)
Operating Humidity		98% RH at 20°C
Vibration Endurance		20 to 200Hz Double Amplitude 1.5mm
Shock		150m/sec ² , 11ms
Life Expectancy		
Mechanically		10 \times 10 ⁶ ops. Min. (no load)
Electrically		10 \times 10 ⁴ ops. Min. (at rated coil voltage)
Weight		abt. 18grs. (NO COVER) abt. 22.5grs. (SEALED TYPE)

REFERENCIAL DATA

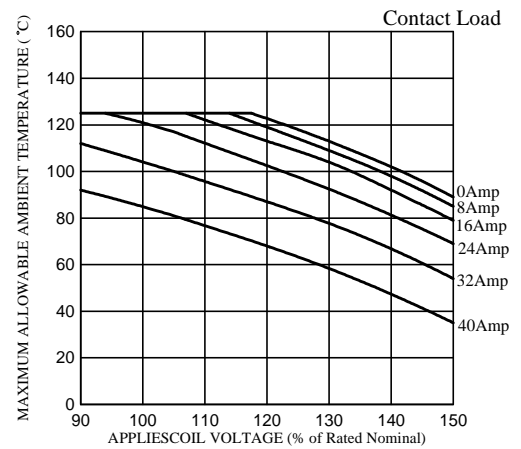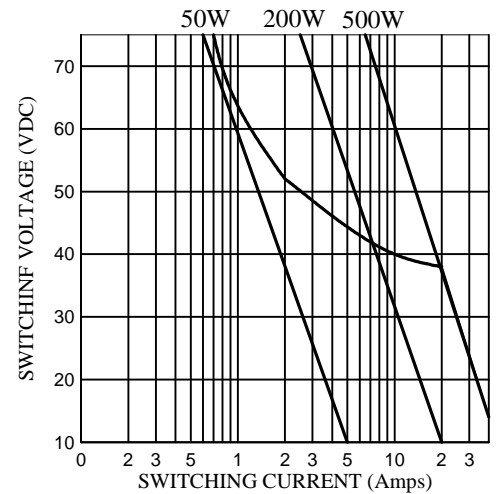

This datasheet for reference and subject to change without notice. Please double check final specification with Tai-Shing.